



**AK-8261**  
**STEAM TRAP, SCREWED ENDS**  
 MATERIAL: C.I. FC-20, SAND CASTING  
 SIZE: 1/2" THRU 2"


**: DIMENSIONAL LIST :**

SIZE	INCH	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
	MM	15	20	25	32	40	50
L		98	105	115	173	173	203
H		68	75	88	115	115	120

- WORKING PRESSURE: 5 TO 230 PSI.
- MAX. WORKING TEMPERATURE: 220°C
- TEST PRESSURE: BODY 350 PSI (WATER)

**: MATERIAL LIST :**

NO	PARTS NAME	CASR IRON
1	BODY	FC-20
2	SCREEN	SUS 304
3	WASHER	ASBESTOS
4	NUT	FC-20
5	BONNET	FC-20
6	NUT	FC-20
7	DISC	AISI 304
8	DRAIN PLUG	SUS 304
9	WASHER	ASBESTOS

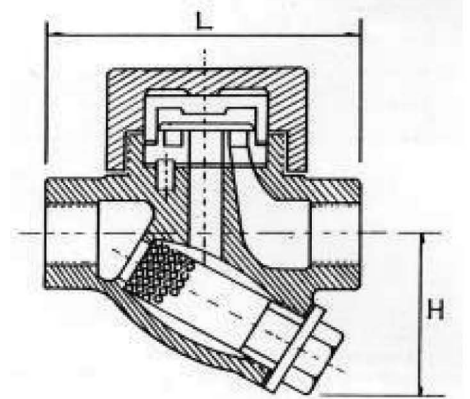

**AK-8161**  
**STEAM TRAP, FLANGED ENDS**  
 MATERIAL: C.I. FC-20, SAND CASTING  
 SIZE: 1/2" THRU 2"

**: DIMENSION LIST :**

SIZE	INCH	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
	MM	15	20	25	32	40	50
L		145	163	170	205	205	240
H		68	75	87	110	110	115

- : REMARKS :**
1. FOR 1/2" TO 1" ARE OCTAGONAL;  
 FOR 1-1/4" TO 2" ARE TETRAGONAL AND BOLTED.
  2. DIMENSIONS OF FLANGE CONFORM TO JIS/10K OR ANSI CLASS 150 SPECIFICATION.

